

Carbon-based Power Capacitor Specifications



	21700Y-022-40	
Nominal capacity (discharged with standard profile <1C) \pm 5%	2,20	Ah
Nominal energy (discharging @1C till cut-off)	6,90	Wh
Nominal voltage	4,00	V
Recommended cut-off voltage @ 1C	2,50	V
Max. recommended charging voltage **	4,20	V
Rated capacity (discharging 50% max current till cut-off voltage)	2,00	Ah
Rated energy (discharged 50% max. current until the cut-off voltage) (cell)	6,30	Wh
Max. C-rate charging *** (cell)	10	C
Max. C-rate discharging *** (cell)	10	C
Max. continuous charging current *** (cell)	22,0	A
Max. continuous discharging current *** (cell)	22,0	A
Max. sustained power capability *** (cell)	11	W
Ohmic Resistance Ri (@50% SoC)	\leq 10	m Ω
Gravimetric energy density (cells) (@1C)	111	Wh/kg
Volumetric energy density (cells) (@1C)	261	Wh/dm ³
Gravimetric power density (cells) @ max. C-rate	1.419	W/kg
Cycles life at 25°C	> 20.000	cycles
Dimensions of cell	21,7 \varnothing x 71,6H	mm
Recommended transportation voltage	3,50	V
Recommended storage voltage	4,00	V
Operation temperature	-35 to +80	°C
Storage temperature	-20 to +45	°C
Retained energy after 28 days at 25°C	92	%
Short circuit temperature	< 150	°C
Weight of cells	62	g
Guarantee period (manufacturing)	12	months
Fire Hazardous substances: Cells do not pose a fire or explosion risk.		

* Custom designed. Specifications might deviate.


** Cell damage possible outside these margins

*** Max. C-rating of powerpack is limited by selected cable and connector parameters and can be lower than theoretical maximum derived from cell parameters.

C-rates can be higher than maximum for a short duration. Contact Altreonic case by case.

www.kurt.energy
18 October 2022

Graphs as tested on a specific cell

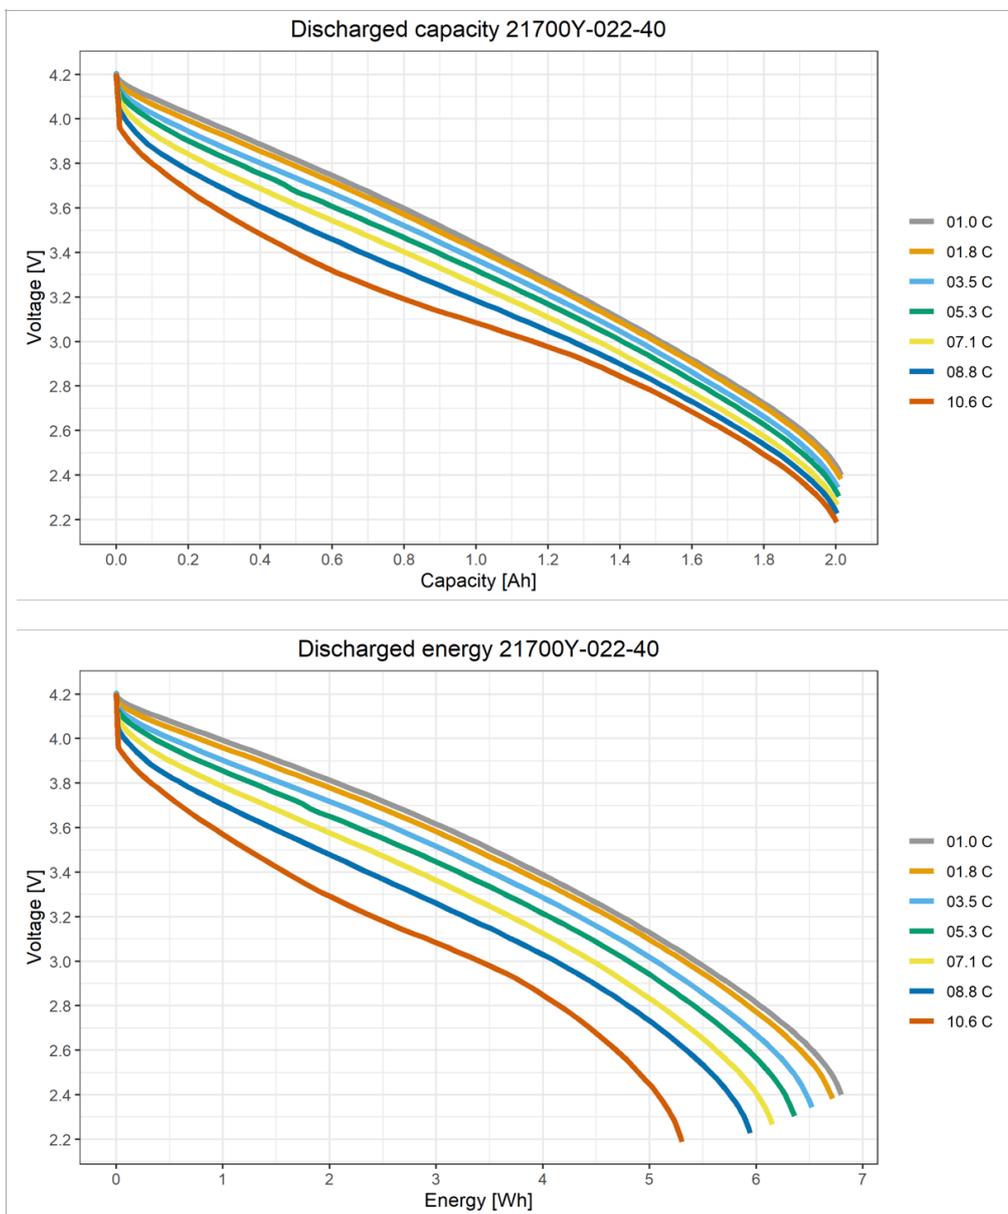

* Custom designed. Specifications might deviate.

** Cell damage possible outside these margins

*** Max. C-rating of powerpack is limited by selected cable and connector parameters and can be lower than theoretical maximum derived from cell parameters.
C-rates can be higher than maximum for a short duration. Contact Altreonic case by case.